

EASTLIKE LED Co., Ltd

CATALOG


LED Lighting Series

Green

Low Carbon

Energy Saving

6. Down Light & Circular Light

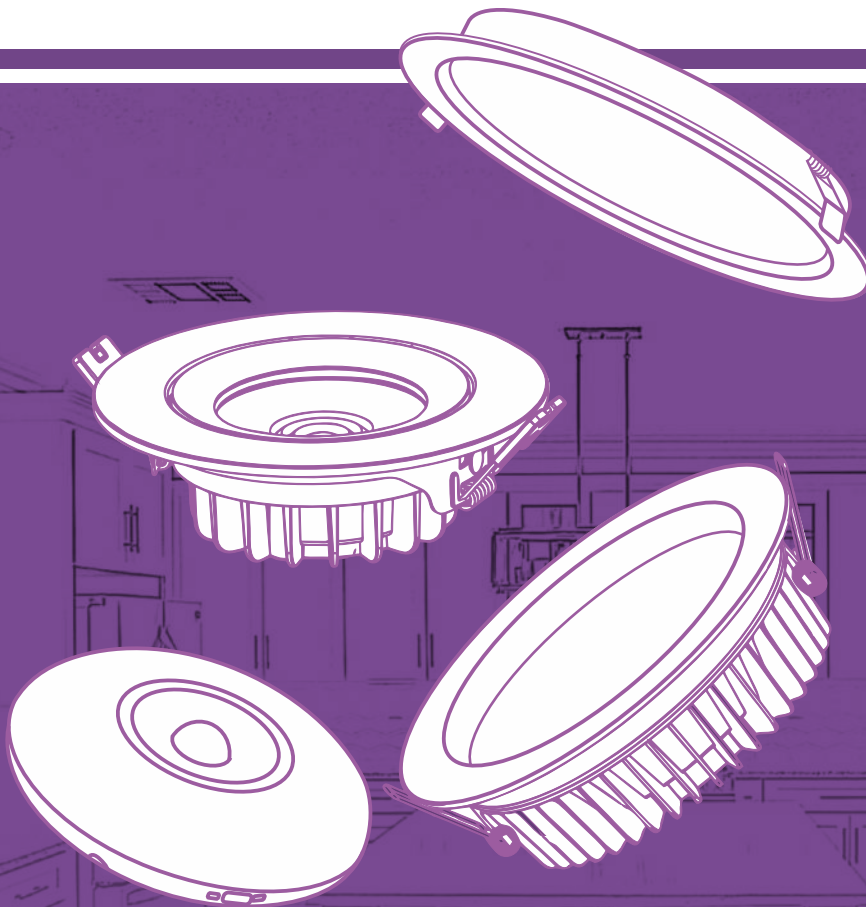



公司簡介 Company Profile



製造和營銷綠色低碳節能照明產品
Manufacturing And Marketing Green Low Carbon
And Energy Saving Lighting Products



EASTLIKE LED COMPANY 東 欖 照 明 公 司

EASTLIKE LED Co., Ltd • emerges as a lighting designer manufacturer and supplier established in Hong Kong and Mainland China .

The company devotes herself in the development, manufacturing and marketing of green, low-carbon and energy-saving lighting products. we are proud to provide a wide range of LED products

東欖LED照明公司•您的照明設計師。

我們作為製造商和供應服務於香港和中國大陸。公司致力於開發，製造和行銷綠色，低碳和節能照明產品。

我們竭誠為您服務，為您提供種類繁多的LED產品。

目录

Content

1. Down Light



P.01

LED嵌入式4.5英寸筒燈



P.02

防眩光LED筒燈



P.03

LED嵌入式3英寸筒燈



P.04

LED嵌入式4英寸筒燈



P.05

LED嵌入式6英寸側發光筒燈



P.06

LED嵌入式6.5英寸側發光筒燈



P.07

4英寸暗裝LED筒燈



P.08

嵌入式3.5英寸COB筒燈



P.09

嵌入式4英寸貼片筒燈



P.10

9英寸明裝筒燈



P.11

嵌入式7.5英寸筒燈



P.12

嵌入式5英寸玻璃筒燈



P.13

嵌入式6.5英寸明裝筒燈



P.14

嵌入式5.5英寸貼片筒燈



P.15

嵌入式7英寸面徑貼片筒燈



P.16

嵌入式7.5英寸貼片筒燈




P.17

嵌入式7英寸暗裝筒燈




P.18

嵌入式5.5英寸暗裝LED筒燈



P.19

嵌入式7英寸筒燈



P.20

嵌入式7.5英寸筒燈

2. Circular Light



P.21

6.5英寸明裝吸頂燈



P.22

led圓形吸頂燈




P.23

人體感應1尺吸頂燈

LED Embedded 4.5-inch Downlight

Series Type: EDLEL45

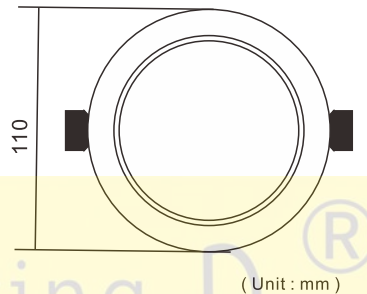

(Unit: mm)

Features 產品特點

EDL-0303-B

- ★ Die casting aluminum shell
- ★ Uniform light emission without stroboscopic
- ★ Embedded installation, installation aperture: 3.5 inches
- ★ Power and color temperature can be customized according to requirements

- ★ 壓鑄鋁外殼
- ★ 發光均勻無頻閃
- ★ 嵌入式安裝,安裝孔徑:3.5英寸
- ★ 功率和色溫可按照要求定制

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0405-A	220-240	5	80	>80	4000	30,000	90	-20~45	110*30
EDL-0405-A	220-240	5	80	>80	4000	30,000	90	-20~45	110*30

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality




光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Anti Glare Downlight

Series Type: EDLLA35

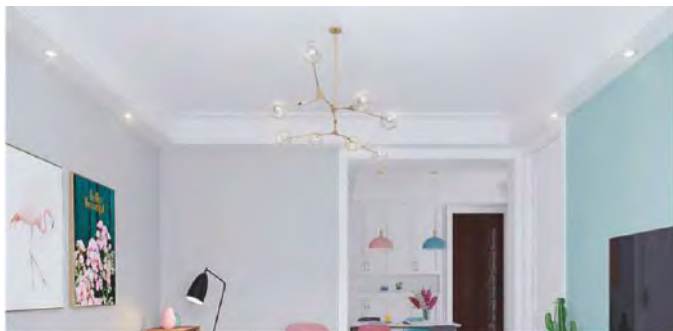

(Unit : mm)

Features 產品特點

- ★ Anti glare and anti fog
- ★ No flash screen
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture: 3 inches

- ★ 深藏防眩光防霧
- ★ 無可視屏閃
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝, 安裝孔徑: 3英寸

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0307-D	220-240	7	80	>80	4000	30,000	90	-20~45	88*46

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

Led Embedded 3-inch Downlight

Series Type: EDLEL30

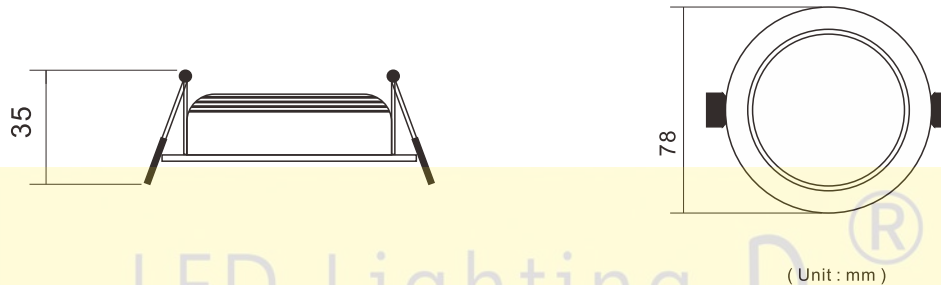

Features 產品特點

- ★ Exquisite frosted surface lampshade, soft light
- ★ Thickened aluminum, strong oxidation resistance
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture: 50-60mm
- ★ 精緻磨砂面燈罩，光線柔和
- ★ 加厚鋁材，抗氧化性強
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝，安裝孔徑：50-60mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0303-B	220-240	3	80	>80	6000	30,000	90	-20~45	78*35

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

LED Embedded 4-inch Downlight

Series Type: EDLEL40



Features 產品特點

- ★ Exquisite frosted surface lampshade, soft light
- ★ Thickened aluminum, strong oxidation resistance
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture: 75-90mm

- ★ 精緻磨砂面燈罩, 光線柔和
- ★ 加厚鋁材, 抗氧化性強
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝, 安裝孔徑: 75-90mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0405-F	220-240	5	80	>80	6000	10,000	90	-20~45	96*45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Embedded 2.5cm Thin Downlight/ceiling Light

Series Type: EDLEA60

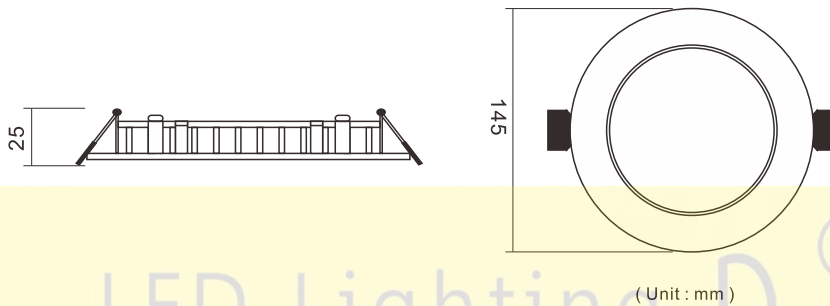

Features 產品特點

- ★ Exquisite frosted surface lampshade, soft light
- ★ Thickened aluminum, strong oxidation resistance
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture: 130mm

- ★ 精緻磨砂面燈罩，光線柔和
- ★ 加厚鋁材，抗氧化性強
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝，安裝孔徑：130mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0609-UC	220-240	9	80	>80	4000	30,000	90	-20~45	145*25

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality




光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

LED Embedded 2.5cm Thin Downlight/ceiling Light

Series Type: EDLEA65

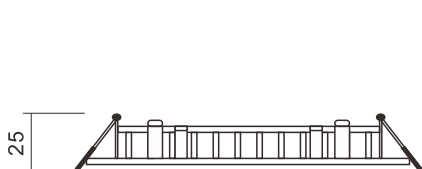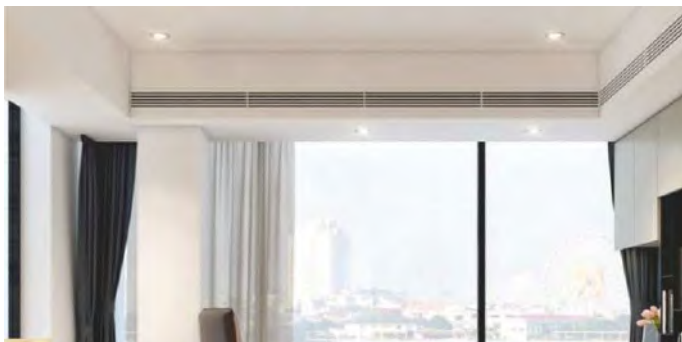

(Unit : mm)

Features 產品特點

- ★ Exquisite frosted surface lampshade, soft light
- ★ Thickened aluminum, strong oxidation resistance
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture:155mm

- ★ 精緻磨砂面燈罩，光線柔和
- ★ 加厚鋁材，抗氧化性強
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝，安裝孔徑：155mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0612-UC	220-240	12	80	>80	4000	30,000	90	-20~45	170*25

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality




光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

4-inch LED Downlight

Series Type: EDLCB40

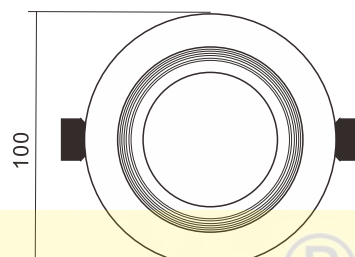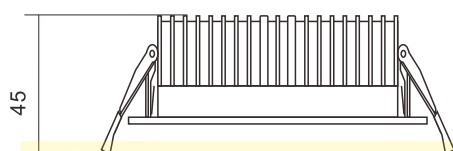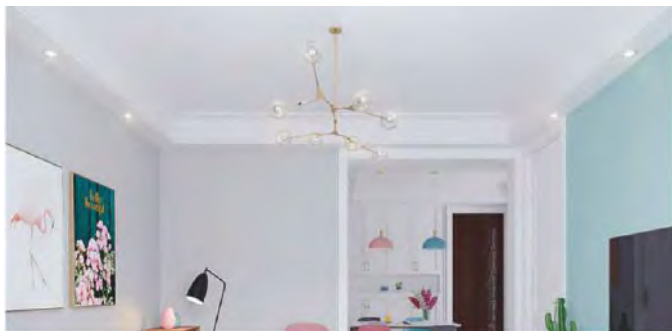

(Unit : mm)

Features 產品特點

- ★ Honeycomb reflective cup design, uniform and bright optical fiber
- ★ Aluminum flake design is adopted in the back to increase heat dissipation efficiency
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture: 70mm

- ★ 採用蜂窩反光杯設計，光纖均勻且高亮
- ★ 背部採用鋁材鱗片設計增加散熱效率
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝,安裝孔徑: 70mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0407-T	220-240	7	80	>80	4000	30,000	90	-20~45	100*45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 3.5-inch COB Downlight

Series Type: EDLEB35



(Unit : mm)

Features 產品特點

- ★ Using Cree COB chip
- ★ Dark light reflector, uniform illumination
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture: 75mm

- ★ 採用普瑞COB晶片
- ★ 暗光反光罩，照度均勻
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝，安裝孔徑：75mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0309-R	220-240	9	90	>80	4000	30,000	90	-20~45	85*46
EDL-0309-R	220-240	9	90	>80	4000	30,000	90	-20~45C	85*46

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 4-inch Chip Downlight

Series Type: EDLPH40



(Unit: mm)

Features 產品特點

- ★ Soft light
- ★ Oxidation resistance of thickened aluminum
- ★ High color rendering to restore true color
- ★ Embedded installation, installation aperture: 90mm

- ★ 光線柔和
- ★ 加厚鋁材抗氧化
- ★ 高顯色還原真實色彩
- ★ 嵌入式安裝,安裝孔徑: 90mm

Specification 產品規格


Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0415-RC	220-240	15	90	>80	4000	30,000	90	-20~45	100*45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.
Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.
This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。
此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。
此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

9-inch Surface Mounted Downlight

Series Type: EDLND90

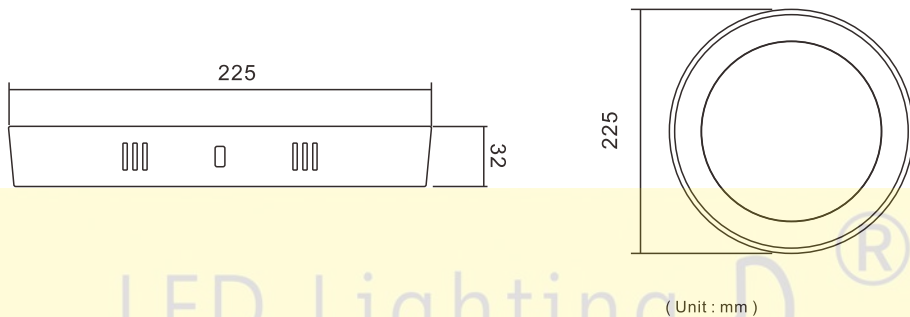

Features 產品特點

- ★ No opening is required for surface mounted downlight
- ★ The light is soft and does not hurt the eyes
- ★ 明裝筒燈無需開孔
- ★ 光線柔和不傷眼

Specification 產品規格


Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0918-PL	220-240	18	80	>80	3000	30,000	180	-20~45	225*32

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.
Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.
This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。
此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。
此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 7.5-inch Downlight

Series Type: EDLES75

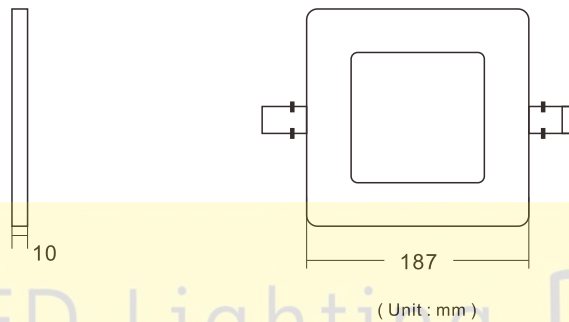

Features 產品特點

- ★ The ultra-thin shell is made of thickened aluminum
- ★ No screen flicker, no eye injury
- ★ Installation aperture: 170-180mm
- ★ 超薄外殼加厚鋁材壓住而成
- ★ 無屏閃視物不傷眼
- ★ 安裝孔徑：170-180mm

Specification 產品規格




Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0715-S	220-240	15	80	>80	6000	30,000	180	-20~45	187*187*10

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.
Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.
This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。
此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。
此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 5-inch Glass Downlight

Series Type: EDLEG50

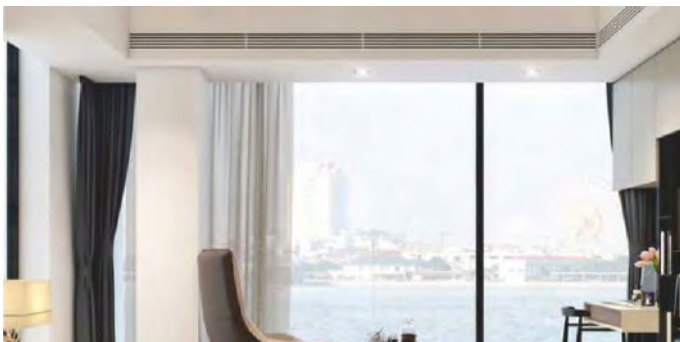

(Unit : mm)

Features 產品特點

- ★ Optical anti glare effect, natural and soft
- ★ Heat dissipation of thickened aluminum
- ★ Installation aperture: 95mm

- ★ 光學防眩 光效自然柔和
- ★ 加厚鋁材散熱
- ★ 安裝孔徑：95mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0509-G	220-240	9	60	>80	3000	30,000	90	-20~45	120*40

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 6.5-inch Surface Mounted Downlight

Series Type: EDLFD65

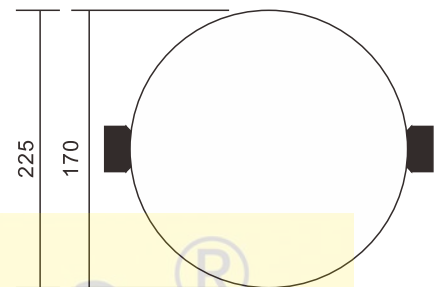

(Unit : mm)

Features 產品特點

- ★ Frameless free opening
- ★ No stroboscopic glare
- ★ Installation aperture: 40-155mm
- ★ Installation aperture: 40-220mm
- ★ 無邊框自由開孔
- ★ 無頻閃無眩光
- ★ 安裝孔徑：40-155mm
- ★ 安裝孔徑：40-220mm

Specification 產品規格

Model 型號	Voltage 電壓 (V)	Power 功率 (W)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Colour Temp 色溫 (K)	Life Time 壽命 (H)	Beam Angle 光束角 (°)	Working temperature 工作溫度 (°C)	Size 尺寸 (mm)
EDL-0624-O	165-265	24	100	>80	6000	30,000	90	-20~70	170*25
EDL-0624-O	165-265	36	100	>80	6000	30,000	90	-20~70	225*25

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 5.5 Inch Patch Downlight

Series Type: EDLEP55



(Unit: mm)

Features 產品特點

- ★ High efficiency heat dissipation of thickened aluminum
- ★ Secondary optical reflection design for uniform light
- ★ High color rendering and true color
- ★ Installation aperture: 110mm

- ★ 加厚鋁材 高效散熱
- ★ 二次光學反光設計 出光均勻
- ★ 高顯色 色彩真實
- ★ 嵌入式安裝，安裝孔徑：110mm

Specification 產品規格


Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0512-N	85-265	12	80	>80	4000	30,000	90	-20~70	140*50

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.
Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.
This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。
此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。
此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 7-inch Patch Downlight

Series Type: EDLEP70



(Unit: mm)

Features 產品特點

- ★ High efficiency heat dissipation of thickened aluminum
- ★ Secondary optical reflection design for uniform light
- ★ High color rendering and true color
- ★ Installation aperture: 145mm

- ★ 加厚鋁材 高效散熱
- ★ 二次光學反光設計 出光均勻
- ★ 高顯色 色彩真實
- ★ 嵌入式安裝，安裝孔徑：145mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0718-N	85-265	18	90	>80	4000	30,000	90	-20~70	180*50

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 7.5 Inch Patch Downlight

Series Type: EDLEP75



(Unit: mm)

Features 產品特點

- ★ High efficiency heat dissipation of thickened aluminum
- ★ Secondary optical reflection design for uniform light
- ★ High color rendering and true color
- ★ Installation aperture: 160mm

- ★ 加厚鋁材 高效散熱
- ★ 二次光學反光設計 出光均勻
- ★ 高顯色 色彩真實
- ★ 嵌入式安裝，安裝孔徑：160mm

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0724-N	85-265	24	100	>80	4000	30,000	90	-20~70	190*50

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 7-inch Concealed Downlight

Series Type: EDLEC70

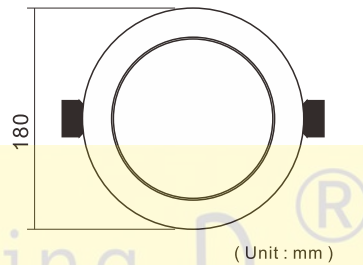

Features 產品特點

- ★ High efficiency heat dissipation of thickened aluminum
- ★ Anti glare mask with high light transmittance, bright and uniform light, anti fog and anti glare
- ★ High color rendering and true color
- ★ Installation aperture: 155mm

- ★ 加厚鋁材 高效散熱
- ★ 防眩高透光面罩 透光率高 光線明亮均勻防霧防眩光
- ★ 高顯色 色彩真實
- ★ 嵌入式安裝,安裝孔徑: 155mm

Specification 產品規格

Model 型號	Voltage 電壓 (V)	Power 功率 (W)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Colour Temp 色溫 (K)	Life Time 壽命 (H)	Beam Angle 光束角 (°)	Working temperature 工作溫度 (°C)	Size 尺寸 (mm)
EDL-0730-I88A4	85-265	30	80	>80	4000	30,000	90	-20~70	180*80
EDL-0730-I88A4	85-265	30	80	>80	6000	30,000	90	-20~70	180*80

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

Embedded 5.5-inch LED Downlight

Series Type: EDLEC55



(Unit : mm)

Features 產品特點

- | | |
|---|--|
| <ul style="list-style-type: none"> ★ High efficiency heat dissipation of thickened aluminum ★ Anti glare mask with high light transmittance, bright and uniform light, anti fog and anti glare ★ High color rendering and true color ★ Installation aperture: 115mm | <ul style="list-style-type: none"> ★ 加厚鋁材 高效散熱 ★ 防眩高透光面罩 透光率高 光線明亮均勻防霧防眩光 ★ 高顯色 色彩真實 ★ 嵌入式安裝,安裝孔徑: 115mm |
|---|--|

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0520-I88A4	85-265	20	80	>80	4000	30,000	90	-20~70	135*70
EDL-0520-I88A6	85-265	20	80	>80	6000	30,000	90	-20~70	135*70

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Embedded 7-Inch Surface Diameter Downlight

Series Type: EDLEH70

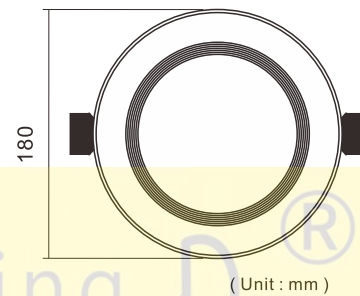

Features 產品特點

- ★ Anti glare frosted transparent sheet
- ★ High efficient heat dissipation outside thickened aluminum
- ★ No visual screen flash, fine and uniform light
- ★ Installation aperture: 145mm
- ★ 防眩磨砂透光片
- ★ 加厚鋁材外高散熱
- ★ 無可視屏閃光線細膩均勻
- ★ 嵌入式安裝,安裝孔徑: 145mm

Specification 產品規格

Model 型號	Voltage 電壓 (V)	Power 功率 (W)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Colour Temp 色溫 (K)	Life Time 壽命 (H)	Beam Angle 光束角 (°)	Working temperature 工作溫度 (°C)	Size 尺寸 (mm)
EDL-0718-H88A6	AC85-265	18	80	>80	6000	30,000	90	-20~70	180*55
EDL-0718-H88A4	AC85-265	18	80	>80	4000	30,000	90	-20~70	180*55

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

Embedded 7.5 Inch Surface Diameter Downlight

Series Type: EDLEH75

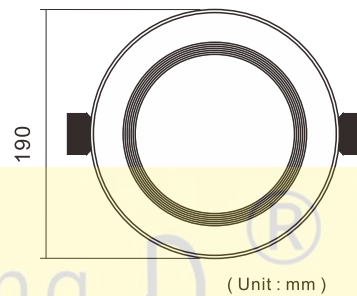

Features 產品特點

- | | |
|--|---|
| <ul style="list-style-type: none"> ★ Anti glare frosted transparent sheet ★ High efficient heat dissipation outside thickened aluminum ★ No visual screen flash, fine and uniform light ★ Installation aperture: 160mm | <ul style="list-style-type: none"> ★ 防眩磨砂透光片 ★ 加厚鋁材外高散熱 ★ 無可視屏閃光線細膩均勻 ★ 嵌入式安裝,安裝孔徑: 160mm |
|--|---|

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EDL-0824-H88A6	AC85-265	24	80	>80	6000	30,000	90	-20~70	190*55
EDL-0824-H88A4	AC85-265	24	80	>80	4000	30,000	90	-20~70	190*55

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

6.5-inch Surface Mounted Ceiling Lamp

Series Type: EILNS65

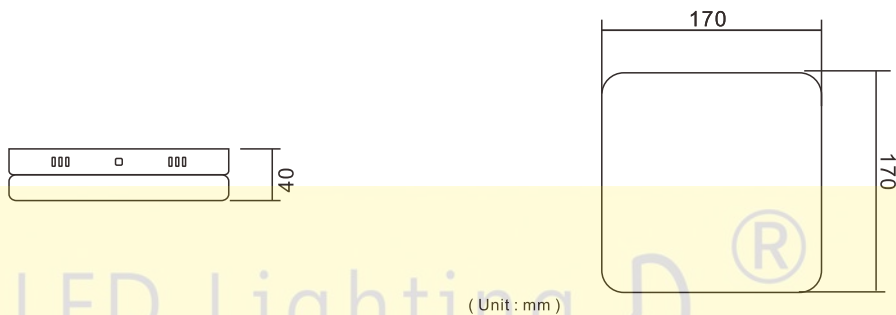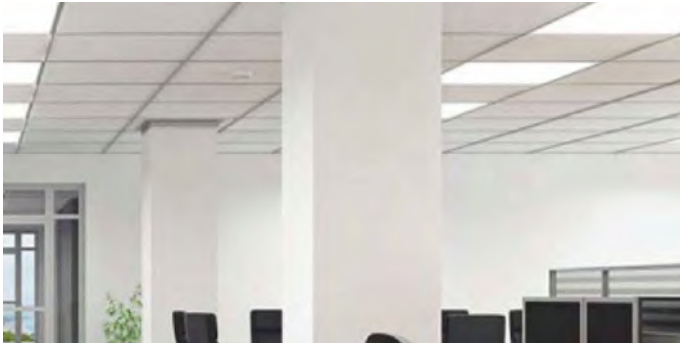

Features 產品特點

- ★ No opening is required for surface mounted downlight
- ★ The light is soft and does not hurt the eyes

- ★ 明裝筒燈無需開孔
- ★ 光線柔和不傷眼

Specification 產品規格



Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
ELR-A24-S	220-240	24	80	>80	4000	30,000	180	-20~45	170*40

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.
 Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.
 This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。
 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。
 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

LED Circular Ceiling Lamp

Series Type: EILRC1C

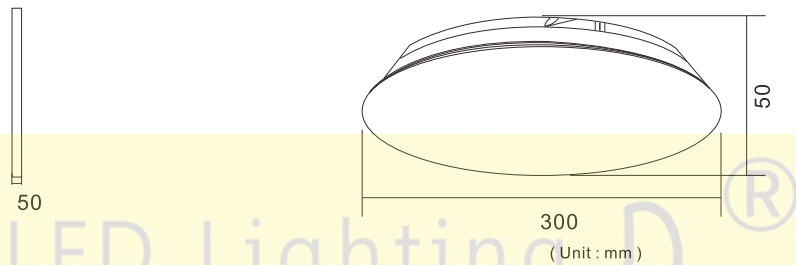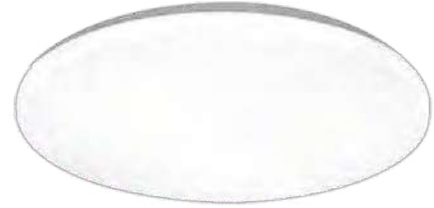

Features 產品特點

- ★ Using PMMA material lampshade, the light color is more uniform and the light transmittance is higher
- ★ The thickened iron chassis treated by paint baking process has good corrosion resistance and heat dissipation.
- ★ High brightness LED light source with lens is adopted, which has high luminous efficiency, more energy saving and more uniform light color.
- ★ The use of stroboscopic power supply is safer and protects your eyes.
- ★ 採用PMMA材料燈罩，光色更均勻，透光性更高
- ★ 使用烤漆工藝處理的加厚鐵底盤，耐腐蝕、散熱好。
- ★ 採用高亮度帶透鏡LED光源，高光效，更節能，光色更均勻。
- ★ 使用無頻閃電源，更安全更加保護你的眼睛。

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
ELR-A24-C	220	24	120	>80	4000	30,000	180	-20~70	300*50

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Human Body Induction Surface Diameter Ceiling Lamp

Series Type: EILIR1C

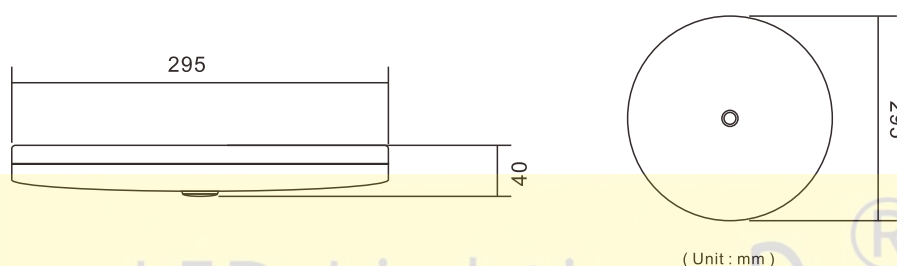

Features 產品特點

- ★ the lamp cap can be rotated 360° and the lamp body can be adjusted up and down
 - ★ High concentration optical reflector
 - ★ Embedded installation, installation aperture: 3 inches
 - ★ Independent constant current power supply
 - ★ It can be customized according to the requirements
- ★ 燈頭360°旋轉調節, 燈身可上下調節
 - ★ 光學反光杯高聚光
 - ★ 嵌入式安裝, 安裝孔徑: 3英寸
 - ★ 獨立恆流電源
 - ★ 可按照要求定制

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
ELR-A18-IR	85-265	18	90	>80	6000	30,000	180	-20~70	295*40

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

東 櫛 LED 照 明 公 司
EASTLIKE LED Co., Ltd

Office Address: Room B3, 18/F Bonsun Industrial Building,
364-366 Sha Tsui Road, Tsuen Wan, HongKong

Phone: 852-3107 7500

Fax: 852-3544 0462

Whatsapp: 852-5977 2627

Email: info@eastlike.com